




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : H04Q 3/66, 11/04, H04M 3/54		A1	(11) International Publication Number: WO 99/62274
			(43) International Publication Date: 2 December 1999 (02.12.99)
(21) International Application Number: PCT/US99/09874		(81) Designated States: CN, European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).	
(22) International Filing Date: 6 May 1999 (06.05.99)			
(30) Priority Data: 09/086,294 28 May 1998 (28.05.98) US		Published <i>With international search report. Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i>	
(71) Applicant: SIEMENS INFORMATION COMMUNICATION NETWORKS, INC. [US/US]; 900 Broken Sound Boulevard, Boca Raton, FL 33487 (US).			
(72) Inventor: STUMER, Peggy, M.; 2350 N.W. 30th Road, Boca Raton, FL 33431 (US).			
(74) Agents: GRUBERT, Andreas et al.; Siemens Corporation, Intellectual Property Dept., 186 Wood Avenue South, Iselin, NJ 08830 (US).			

(54) Title: ROUTING OPTIMISATION FOR REDIRECTION SERVICES

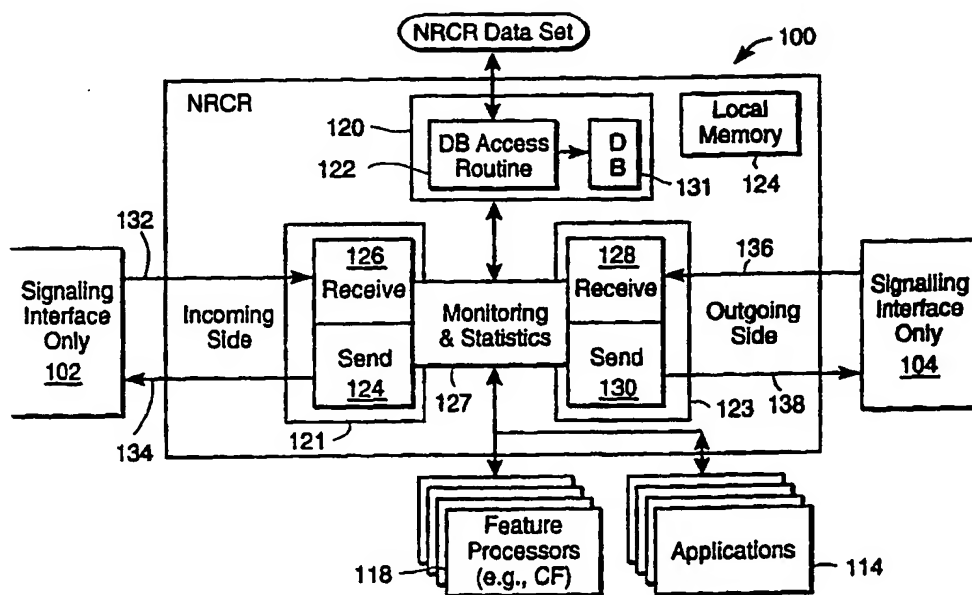

(57) Abstract

A system and apparatus within a communications server for intercepting supplemental service requests to a communications network and ensuring redirection to correct network party and optimal resource usage when redirecting a call over the network. The optimization system includes a database (131) and database server software (122). A device/trunk handler (121, 123) is used to interface signalling channels to the optimization system. A monitoring and statistics unit (127) monitors the signalling channels. The server software (122) is responsive to the monitoring and statistics unit (127) and selects the routing of the supplementary service through the appropriate server(s) in the network.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece			TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	NZ	New Zealand		
CM	Cameroon	KR	Republic of Korea	PL	Poland		
CN	China	KZ	Kazakhstan	PT	Portugal		
CU	Cuba	LC	Saint Lucia	RO	Romania		
CZ	Czech Republic	LI	Liechtenstein	RU	Russian Federation		
DE	Germany	LK	Sri Lanka	SD	Sudan		
DK	Denmark	LR	Liberia	SE	Sweden		
EE	Estonia			SG	Singapore		

ROUTING OPTIMISATION FOR REDIRECTION SERVICES

BACKGROUND OF THE INVENTION**1. Field of the Invention**

5 The present invention generally relates to a network optimization system and, more particularly, to an optimization system for enabling supplementary service requests to be controlled and routed through the most optimal network resources, particularly when more than one network exists between end users and when the networks are geographically dispersed, such as being located in different countries.

2. Description of the Prior Art

10 It is well known that modern telephone systems are able to provide a wide variety of convenience features or supplementary services to enhance calling convenience. For example, call redirection is a particular supplementary service
15 typically used by callers and includes specific features such as call diversion and call transfer. Call diversion, also known as call forwarding, provides the caller the ability to program a telephone with a third party's number such that any calls to the forwarding party's telephone number will be automatically forwarded to the third party's number. Call transfer enables either the calling party or the called party to
20 transfer the other party to a third telephone number.

 Unfortunately, supplemental services, such as call redirection, do not always make the most efficient use of network resources. Furthermore, some supplementary services may fail or be improperly routed to the wrong destination because they cannot be performed by one or the other user involved in a connection.

25 For example, if a user calls another user who is forwarded to a third party and the forwarding user performs the diversion, the network setup to the forwarded-to user may require more links than necessary. Similarly, if the calling party performs the diversion, the redirection number may be foreign or unknown in the calling party's system or network. This can happen when multiple inter-connected networks have

- 2 -

numbering plan conflicts (i.e., duplicate numbers between networks). As such, the diversion will fail or reach the wrong party. Another example of usage occurs when there exists overload/high contention circuits/facilities between one network (or server) and another. There may not be an available circuit/facility for the calling server to make the call to the redirected-to server.

Therefore, what is needed is a system for enabling only the most appropriate and optimal usage of network resources when completing supplemental service redirection requests and for enabling the existing highly contented circuit to be retained and reused for the connection to the redirected-to server to ensure a greater degree of success in reaching the new destination.

SUMMARY OF THE INVENTION

Briefly, the present invention relates to a system and apparatus within a communications system for intercepting supplementary service redirection requests to a communications network and controlling resource for optimizing resource usage when setting up a call over the network. The network services control system is adapted to retrieve server identification data and to write statistical data in order to optimize network resources. A device/trunk handler is used to interface one or more incoming and outgoing signalling channels to the optimization system. A monitoring and statistics unit monitors the signalling channels when a call is made or is in progress. The server software controls the routing of the supplementary service in the network through one or more selected servers. Therefore, in a particular embodiment of the invention, when a predetermined service command is placed to the communications system, the network services control system can selectively intercept the command and reroute the call through the appropriate available servers, thereby ensuring termination to the correct user, reusing hard to get communications facilities and establishing the most optimal route to the call's final destination.

BRIEF DESCRIPTION OF THE DRAWING

- 3 -

Other features, objects and advantages of the present invention will become readily apparent and understood upon consideration of the following detailed description and attached drawings, wherein:

FIG. 1 is a block diagram of a known interconnected communications network.

FIG. 2 is a block diagram of a communications server embodying the optimization system in accordance with the present invention.

FIG. 3 is a detailed block diagram of the optimization system shown in accordance with the present invention.

FIG. 4 is a flow chart of a data base access routine used in the optimization system as shown in FIG. 3.

FIG. 5 is a block diagram showing the handling of a call forward redirection in accordance with the present invention.

FIG. 6 is a block diagram showing the handling of a call transfer redirection in accordance with the present invention.

FIG. 7A is a flow chart of the data base access routine in operation.

FIG. 7B is a flow chart of the Acknowledge/Server subroutine of the database access routine.

FIG. 7C is a flow chart of the Reject subroutine of the database access routine.

FIG. 7D is a flow chart of the Block subroutine of the database access routine.

FIG. 8 is a block diagram of a known interconnected communications network having gateway servers.

DETAILED DESCRIPTION OF THE INVENTION

The present invention relates to a system for enabling supplementary service functions, such as call redirecting, to be implemented in an interconnected network system using appropriate and available servers and trunk facilities, for optimizing usage. Usage optimization is achieved by enabling any server in the

- 4 -

connection to intercept and control the routing of supplementary service functions. Thus, an important aspect of the invention relates to an intervening (i.e., tandem, gateway) server intercepting the supplementary service requests, such as redirect commands, reusing selected trunk facilities, and enabling the network to route the call correctly to the redirected-to party in the network.

Still another important aspect of the invention relates to the selected server redirecting the call to the appropriate server. The optimization system enables the selected server to control the redirection at other servers in the network, regardless of whether the other servers selected for the redirection are involved in the connection. Furthermore, the optimization system is able to suppress any redirection of a call if the network does not support signalling for redirection services or, for other unknown reasons, a particular user must not be redirected.

Referring to FIG. 1, a known interconnected telecommunications network system is shown. As can be seen, several routes are available from the originating network 2 to the destination network 4. Typically, each network also has an associated server 6, 8 that controls network functions. Such a system of interconnected networks sometimes include differing networks which may not be compatible. For example, one network with an ambiguous numbering plan may, under general circumstances, not be able to connect to another network having an ambiguous numbering plan. Therefore, the present invention provides special functionality in the communications system, and in particular the network server 6, 8 to enable incompatible networks to communicate with one another. Furthermore, in those instances where the networks are compatible, the invention ensures that the call is being routed through servers which provide the most optimal route (where optimal is determined by pre-defined data for this network).

Still another important aspect of the invention relates to ensuring termination to the correct user and establishing the most optimal route to the call's final destination. Referring to FIG. 8, an interconnected network 800 is shown having gateway servers 810, 812. As illustrated, the interconnecting link 814 represents a

- 5 -

physical trunk between the gateway servers 810, 812. For purposes of clarity, the reference numerals for the networks are enclosed within parenthesis in the following discussion.

By way of example only, User 2 in the server 816 in Network A (802) transfers User 2 in the server 820 in Network B (804) to User 3 in the server 818 in Network A (802). User 2 in the server 816 and User 2 in the server 820 have identical network addresses and use a barrier code to dial each other in order for correct routing. If the transfer were to be performed in a known joining type method, also called forward switching, wherein User 2 in the server 816 in Network A (802) would set up the call to User 3 in the server 818 in Network A (802) on behalf of User 2 in the server 820 in Network B (804), five (5) links would be required in the connection. The required links would include: 1) User 2 in the server 820 in Network B (804) to server 812 in Network B (804); 2) Server 812 in Network B (804) to server 810 in Network A (802); 3) Server 810 in Network A (802) to server 816 in Network A (802); 4) Server 816 in Network A (802) to server 810 in Network A (802); and 5) Server 810 in Network A (802) to User 3 in the server 818 in Network A (802).

Similarly, if the transfer were a reroute, also known as throwback, wherein User 2 in the server 820 in Network B (804) sets up the call to User 3 in the server 802 in Network A (802), User 3's address may be duplicated in Network B (804) and the call would be routed in error to User 3 in the server 822 in Network B (804).

In contrast, the present invention enables the redirection to be intercepted and rerouted. For example, server 810 in Network A (802) may perform the setup to server 818 in Network A (802) and clear the link between server 810 and server 816 in Network A (802). This results in using only three links after the redirection is completed. The links include: 1) Server 820 in Network B (804) to server 812 in Network B (804); 2) server 812 in Network B 804 to server 810 in Network A (802); 3) server 810 in Network A (802) to server 818 in Network A (802). This ensures correct routing to the redirected-to party and link optimization at the same time. Furthermore, the present invention can retain and reuse links in the existing connection. For example, the link 814 may be congested, thereby causing network

- 6 -

busy conditions. Thus, if the originating server were to perform the redirection, the redirection could fail. In contrast, the present invention enables links (e.g., 814 and backward) to be retained and re-used in the connection to the redirected-to destination.

5 Referring to FIG. 2, an exemplary embodiment of the optimization system shown as a network services control (NRCR) system in accordance with the present invention, generally identified with the reference 100, is illustrated. Although the NRCR system is shown in a public telecommunication network/exchange (PTN/X) utilizing an integrated services digital network (ISDN), it should be understood by
10 those with ordinary skill in the art that the principles of the present invention are applicable to various interconnected network systems, including asynchronous transfer mode (ATM) networks, local area networks (LANs) and mixed environments having LAN and PTN/X interconnected networks

In an ISDN type system, as further described below, the servers
15 communicate with one another, and with local devices, generally through external interfaces such as a basic rate interface (BRI) and a primary rate interface (PRI). BRI service, because of the inherent bandwidth limitations imposed by existing copper telephone lines, is typically used for local traffic. PRI is generally used for incoming and outgoing trunk traffic where large amounts of data are carried. Typically, fiber
20 optic lines, for example, are required to handle the extremely large bandwidths of PRI.

As shown in FIG. 2, the NRCR system 100 may be implemented in a communication server 16. The communication server 16, which may be any known communication server, includes standard components such as prefix logic 110 and
25 digit analysis 112 for receiving and evaluating digit strings, applications 114 such as computer telephony interface (CTI) applications, and routing 116 for routing a call to its proper destination. These components are conventional and are not part of the present invention and are therefore not further discussed. The communication server 16 also includes a feature processing module 118 for handling the
30 supplementary services, as discussed above, such as call forwarding and call

- 7 -

transfer.

It is to be noted that NRCR systems 100 (multi-processing service), may be installed on both the trunk and line side in a single communication server 16, i.e. devices and/or trunks 10, 12, 14 to which the server 16 interfaces. In particular, an NRCR system 100 can be employed at each point where the server 16 connects to an external interface to enable each communications path to be monitored. Each of the external interfaces 10, 12, 14 to the server 16 generally use both-way traffic flow and hence have their own send 124, 130 and receive 126, 128 paths (FIG. 3) for each path (i.e. send path and receive path). Both way signalling is necessary to enable inter-server communications.

Referring to FIG. 3, the NRCR system 100 is shown in greater detail. As mentioned above, the NRCR system 100 is responsible for controlling supplementary communications services, such as call forwarding and call transfer, by intercepting supplemental service requests and ensuring that such services are routed through the most optimal servers available such that best use is made of available resources. The NRCR system 100 includes one or more device/trunk handlers 121, 123 as described below; a monitoring and statistics unit (MSU) 127 for monitoring and decoding signalling channel data; a non-volatile storage unit 120; and a local memory 129 for caching temporary work data. The non-volatile storage device 120 is provided to store a database 131 and database access software 122 to control the access of data for the NRCR system 100.

The incoming trunk 12 (FIG. 2) includes a signalling interface 102, 104 (FIG. 3). It should be understood that the signalling interface 102, 104 may be the same type interface and may be a bothway (i.e., incoming and outgoing) trunk facility, but is shown as two different components as would be true in a tandem and gateway context (i.e., an incoming trunk and outgoing trunk). The present invention is also applicable at a terminating server, which could perform the interception and rerouting. Accordingly, the signalling interface 102, 104 of the external interface 12 has an incoming side and an outgoing side, each of which further includes a send path 134 or 138 and receive path 132 or 136 which interface to the send 124, 130 and

- 8 -

receive 126, 128 paths of device/trunk handlers 121, 123. The device/trunk handlers 121 (incoming trunk), 123 (outgoing trunk) interface the server 16 with the BRI and/or PRI external interface 12 and 14 respectively, which contains the signalling channels. Accordingly, an NRCR system 100 may be applied at each point where a server and a
5 PRI and/or BRI connect (FIG. 2). This enables sending and receiving messages to and from the communications servers on each communications interface as used herein. BRI and PRI may be used interchangeably since the invention generally operates by using the D channel and the associated protocols to receive and transmit messages between communications servers. The D channel description is
10 therefore equally applicable to both types of interfaces. The present invention may use only the D channels for all signalling and inter-server communications messages. D channel signalling protocols are specified by the International Telecommunication Union (ITU) Q.930/931 specification. It should be noted that although some form of signalling data may also be carried by the B channels, by
15 using only the D channels for signalling, the B channels generally remain free to carry communications data.

As mentioned above, the device/trunk handlers 121, 123 interface the NRCR system 100 to the PR and BR interfaces connected to the server 16. In particular, the handlers 121, 123 operate as translation devices and are able to support various
20 protocol types. This may be accomplished through a standard message interface between the device/trunk handlers 121, 123 and the PR and BR interfaces.

The MSU 127 interfaces to the device/trunk handlers 121, 123 and monitors and decodes the data carried on the signalling channels of the PR and BR interfaces. In particular, the MSU 127 monitors the incoming receive 132 path and the outgoing
25 receive 136 path for supplemental service related signals as defined in the database access software 122, described in detail below. Furthermore, the MSU 127 may also provide statistical data regarding the operation of the NRCR system for use by network administrators or technicians in gauging network performance and/or diagnosing network related problems. The MSU 127 also interfaces to the feature
30 processing module 118 and applications 114, which provide the particular service

- 9 -

operations such as user interface functions, timing and request and response directives.

An important aspect of the invention is the ability of the NRCR system 100 to choose the most optimal servers through which to route calls, based on the type of supplementary service requested. Accordingly, the database 131 may be used to store a list of one or more servers' addresses, listed in order of redirection priority, that are available in the network. The database 131 may also be used as the data source for the database access program 122. Local memory 129 may also be provided to cache or store temporary work data, such as redirect data or database lists, as described in greater detail below.

The database 131, as mentioned above, may be programmed by a network programmer to store a list of available servers that may be used in the redirection operation. The server list is arranged such that those servers that are available for handling the redirect function are listed in order of redirection priority. For example, the most optimal server available may be at the top of the list and the least optimal server may be at the bottom, with the rest of the servers falling somewhere in between. Thus, when the database is accessed, the database access program 122 attempts to select the highest priority server and moves down the list through the lesser priority servers, as required, depending upon the availability of each server.

Referring to FIG. 4, the database set structure with brief description of parameters and values 131 is shown. The database access program 122 accesses the NRCR system 100 data for control and is used to select the particular servers from the database 131 that will be used in routing the calls. In particular, the database 131 includes a SERVICE_INDEX pointer which points to a table element "n" in a data set that identifies the particular services to be monitored by the MSU 127. The SERVICE_INDEX value may be set by the network programmer in order to cause the NRCR system to be activated based on the type of supplemental service requested. For example, the SERVICE_INDEX_n points to a table element that identifies the service to be intercepted e.g., call forward. The particular selected service is identified from the service request data sent over the signalling channels and

- 10 -

detected by the MSU in the receive path 126 or 128 (depending on service type). Also included is an **NRCR_TYPE** variable for executing a particular subroutine based on its value. In particular, the subroutines include **REJECT**, **ACK** and **BLOCK**, as discussed below. The database 131 optionally may also include **SCHEDULE** data for specifying when the **NRCR** wakes up or sleeps. Furthermore, **RESTRICTION** data may optionally also be included to specify, for example, predetermined conditions under which the **NRCR** system 100 should not be executed or to specify predetermined users that should not have access to features of the **NRCR** system. Other types of restriction data may also be included.

Referring to FIG. 7A, in operation, therefore, the database access program 122 in step 200 causes the **NRCR** system 100 to wake up or sleep based, for example, on the **SCHEDULE** subroutine. The mechanism for waking and sleeping is implementation-dependent. When awake in step 202, the **NRCR** system 100 monitors the signalling channels 102 and 104 for service requests in step 204. Each time a service request is detected in step 205 it is compared to a predetermined **SERVICE_INDEX** value in step 206, which indicates the particular supplementary service being requested. If the service request matches the **SERVICE_INDEX** in step 208, the **NRCR** system checks the restrictions data in step 210 for exception conditions as to when not to apply the **NRCR** system functions. In step 212, if no exceptions apply, then in step 214 the **NRCR_TYPE** value is determined. In steps 216, 218, 220, as discussed further below, subroutines dependent on the **NRCR_TYPE** variable are executed, such as **REJECT**, **ACK** and **BLOCK**, respectively. The service request also includes associated redirect data needed to redirect the call, such as the redirection number, redirecting number and redirected number. As mentioned above, the redirect data is stored in the memory register 129. If no redirect data is provided, the redirection will fail.

Once it has been determined that the service request matches the **SERVICE_INDEX**, the **NRCR_TYPE** variable, as mentioned above, may be set to one of the three possible values.

In particular, referring to FIG. 5, an example of signalling information where

- 11 -

NRCR_TYPE equals REJECT for a call forwarding (CF) redirection situation is shown. The REJECT subroutine is executed in those cases where a particular server cannot service the redirection request and the requestor should redirect the call. Typically, during CF redirection, the forwarding party enters a different telephone number at which all or specific calls intended for the forwarding party are automatically sent to the forwarded number. Thus, when a calling party originates a call to the forwarding party, the call will be completed at the forwarded number. However, in certain instances, an intervening server may not be able to handle the CF function request. For example, this may occur in a situation where a server does not support the particular type of that redirection service being requested or where signalling channel information cannot be sent to a server. In that case, an alternate server must be used through which the call may be routed. Accordingly, the example shown in FIG. 5 describes the situation wherein terminating server (i.e., forwarding user's server) executes the CF routing function to the forwarded number rather than the intervening or originating server. The intervening server rejects the facility request on behalf of the originating server. Upon the forwarding server receiving the reject, it shall attempt to forward-switch the call.

In particular, the NRCR system 100 is applied at the server 16 on the outgoing side of a signalling channel for a call forward (CF) redirection service. Therefore, the MSU 127 monitors and decodes the signals on the outgoing receive side of the server since the service requestor is on the CRV=2 side of the call (CRV=n is an ISDN call reference value identifier associated with the call).

In step 1, a call setup message is transmitted over the signalling channel to the incoming receive side of the intervening server. The call setup message is then sent to the forwarded number's server. In step 2, the server at the forwarded number, in response to the call setup message, returns a CF redirection request along with redirect data toward the originating party's server. In this case, since the intervening server database is predefined with a reject response in step 3 a return REJECT response is sent to the forwarded number server notifying it that the intervening and originating server cannot perform the CF redirection. In step 4, the

- 12 -

service requestor has received the reject and performs a forward-switching function to forward the call on behalf of the originating server and then sends a message to the caller with notification of call forward.

5 In operation therefore, referring to FIG. 7C, when the REJECT subroutine is executed, the NRCCR system will return notification of the rejection to the service requestor in step 238. Typically, once the service requestor receives notification of the rejection, it will perform the redirection itself on behalf of the user to be redirected in step 242. In step 244, the call is notified of the CF attempt.

10 Referring to FIG. 6, an example of signalling information where NRCCR_TYPE equals ACK is shown for a call transfer (CT) redirection situation. The ACK subroutine is executed when the intervening server, i.e., a third party, is available to handle a redirection request. Typically, during CT redirection, either the calling or the called party may transfer the other party to a third number. Therefore, in this particular example, it is shown that the intervening server is indeed able to handle the CT redirection. Accordingly, the example shown in FIG. 6 describes the situation wherein the intervening server executes the CT routing function to the transferred number.

15 In particular, the NRCCR system 100 applies at a server on the incoming receive side and outgoing receive side of a signalling channel for CT redirection service. Monitoring of the signalling channels by the MSU 127 takes place at both sides of the server since either user might invoke the CT service. In this example, in step 1, the service requestor is on the CRV=2 side of the call and the NRCCR_TYPE is ACK. This NRCCR_TYPE results in execution of step 2, wherein a response is sent to the service requestor with positive ACK. In step 3, a CT redirect notification is sent to a remote server. It should be noted that the order of steps 2 and 3 may be reversed.

20 In step 4, a connection to the redirected-to user is established with indication that this is a redirected call and, optionally, the redirecting and calling user's identification information. After receiving an alert message (i.e., redirection success) from the outgoing receive side in step 5, the connection to the redirecting user is released and the timer is stopped. The caller is switched to the timeslot of

30

- 13 -

the redirected-to party. The redirection is successful and the transaction (i.e., redirection) is considered complete. Step 6 shows the call was answered. The memory 129 is also reinitialized to erase the redirect data. It is to be noted that if the NRCR system 100 redirection fails (e.g., network congestion, DISConnect received) for some reason, the NRCR system 100 will recall the transferring user. In particular, a timer (t1) which may be an internal software timer of a pre-determined time interval, is started at the time of responding to the redirecting requestor, i.e. the incoming send side. The connection is not disconnected at this time, it is retained until the redirect is successful, if not successful, recall occurs. If the redirection has not been successful at timer expiry (t), the redirecting requestor is recalled.

In operation therefore, referring to FIG. 7B, when an ACK subroutine is executed, the system absorbs the service request in step 222 and acknowledges the service request in step 224. In step 226, the intervening server sends a setup with redirection notify to the redirected- to server. In step 228, the calling user is notified of the redirection. In step 230, the system determines whether the setup was successful i.e., ALERT or CONNect message is received. If so, then the channels are switched together and in step 236 the connection to the requestor is cleared. If the redirect request was not successful, then in step 232 a recall message is sent to the requestor.

When the NRCR_TYPE equals BLOCK, the signalling channel is monitored for the associated SERVICE_INDEX. If a redirection request is detected, the message is absorbed and no response is returned to the sender nor is any notification provided by the NRCR system 100 to the party being redirected. The sender of the redirection request's guard timer will elapse and exception handling will follow. This NRCR_TYPE is typically used when the user to be redirected is in a network which does not support the signalling for redirection services and may not support notification signalling either.

In operation, referring to FIG. 7D, the BLOCK subroutine is executed in those instances when no redirection is allowed or possible. Thus, when the BLOCK subroutine is executed, in step 245 the system absorbs any message which could

- 14 -

result in a redirection failure, or other event, depending on how the service requestor handles a no response, and in step 246 takes no further action.

5 Optionally, the database access program may also include a SCHEDULE subroutine for enabling the NRGR system to wake up or sleep, based on, for example, the time of day, day-of-year etc., trunk costs, priority or other parameters specifying when or when not to start. Furthermore, the database access program may also include an optional RESTRICTION subroutine for determining exception conditions as to when the control system should not execute.

10 As an option, the NRGR system 100 may be implemented, using the MSU 127, to collect and store redirection statistics such as number of REJECT intercepts, ACK intercepts and BLOCK intercepts, number of redirection failures etc., for use by the network and/or the system administrator.

15 Thus, it can be seen that present invention prevents failure of redirection services in those instances where one or more servers are not able to handle particular service requests and ensures that only the most optimal servers are used in performing many of the redirection functions. In addition, the invention provides the ability to optionally condition execution of supplementary service requests based on a variety of user selectable criteria.

CLAIMS

What is claimed is:

1. A system for controlling communications network resource usage,
5 characterized by:
means (16) for executing supplementary communications service
requests;
means (127) connected to said executing means for receiving and decoding
supplementary service information for said supplementary communications service
10 being requested;
means (122) responsive to said receiving means (127) for selecting which of
said executing means (16) will execute said communications services.
2. The system as recited in claim 1, wherein said supplementary
15 communications services include redirection services.
3. The system as recited in claim 2, wherein said redirection services
includes call forwarding.
- 20 4. The system as recited in claim 2, wherein said redirection services
include call transfer.
5. A system for optimizing resource usage in an interconnected network,
characterized by:
25 one or more means (16) in the interconnected network system for
executing supplementary communications service requests;
means (127) for receiving and decoding supplementary service information
for the supplementary communications services being requested; and

means (122) responsive to said receiving and decoding means (127) decoding supplementary service information for selecting which of said one or more executing means (16) will execute said communications services, said executing means (16) further enabling said optimization system only under predetermined conditions.

6. The system as recited in claim 5, wherein said selecting means (122) further includes means (122) for disabling said optimization system under predetermined conditions.

7. The system as recited in claim 7, wherein said disabling (122) means is responsive to a recall mechanism for failed service requests.

8. The system as recited in claim 5, wherein the optimization system includes means (118, 114) for customizing one or more operating parameters of the optimization system.

9. A method for controlling communications network resource usage in a communications network, characterized by:
executing (16) supplementary communications service requests;
receiving (127) and decoding supplementary service information for said supplementary communications service being requested;
selecting (122) one or more servers to execute said communications services.

10. The method of claim 9, further including the step of enabling (122) said selecting step (122) under predetermined conditions.

11. The method of claim 9, further including the step of disabling (122) said selecting step (122) under predetermined conditions.

12. The method of claim 9, further including the step of customizing (118) one or more operating parameters of the communications controlling method.

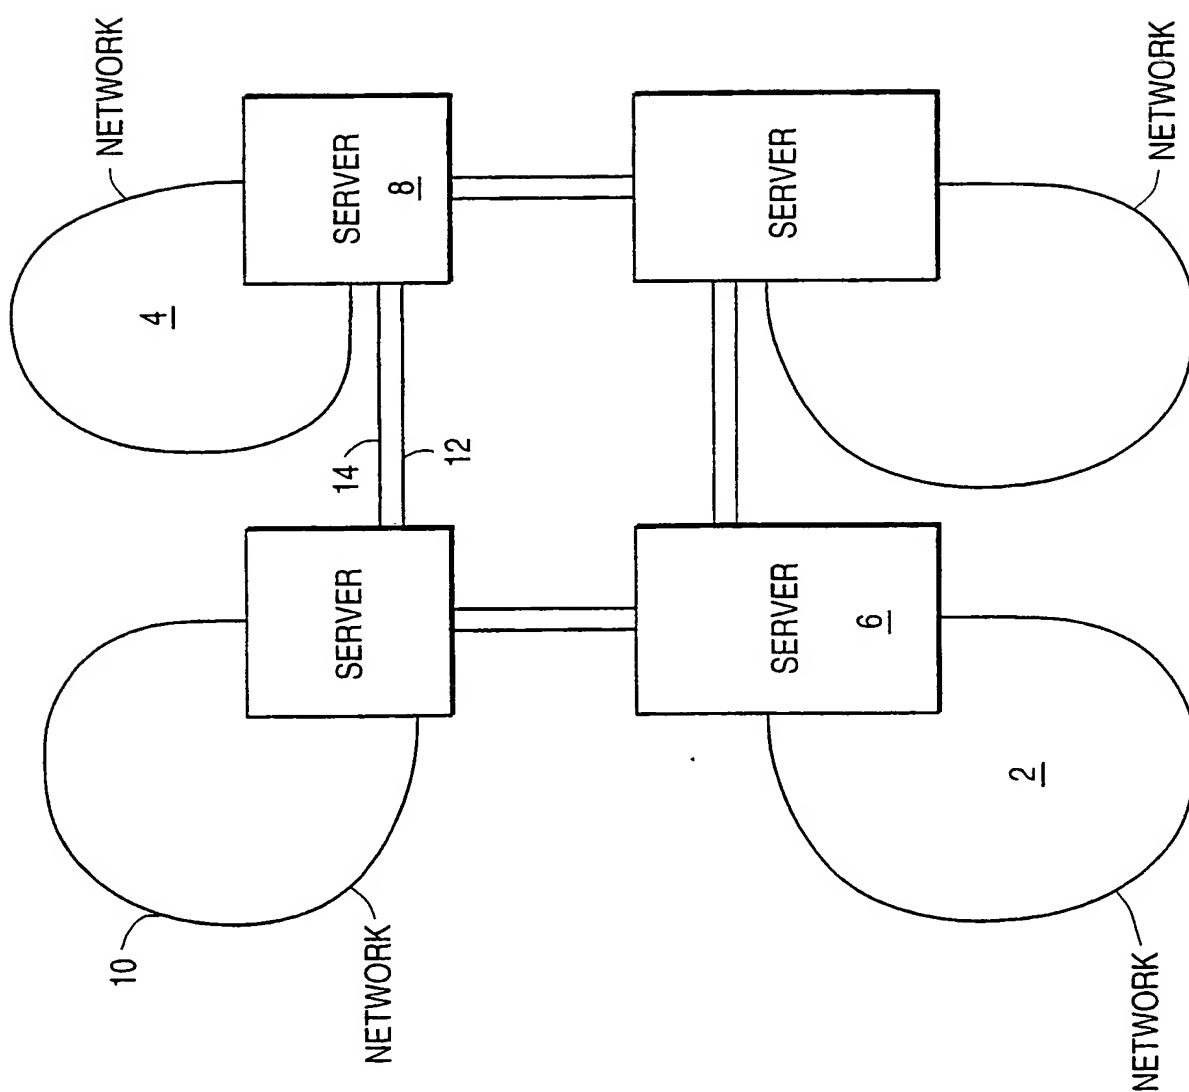


FIG. 1

2/9

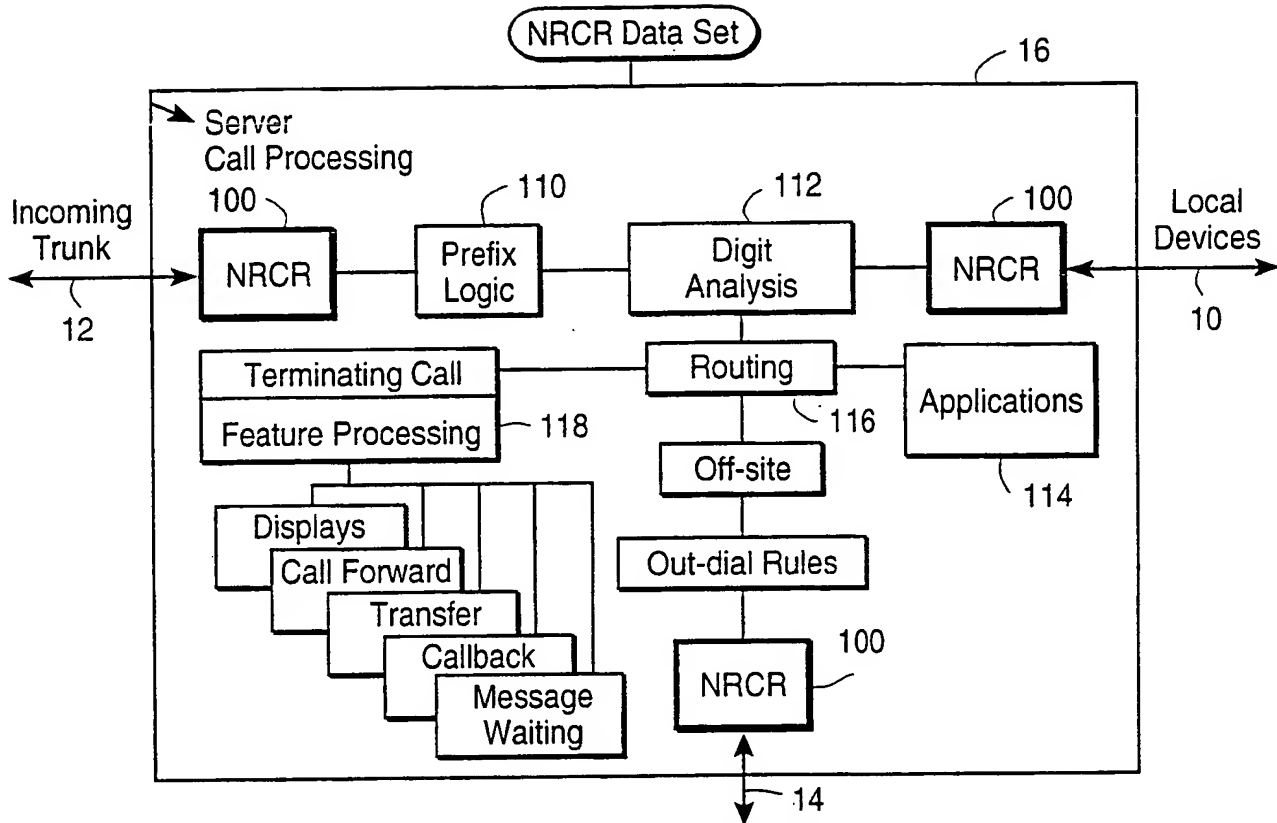


FIG. 2 Outgoing Trunk

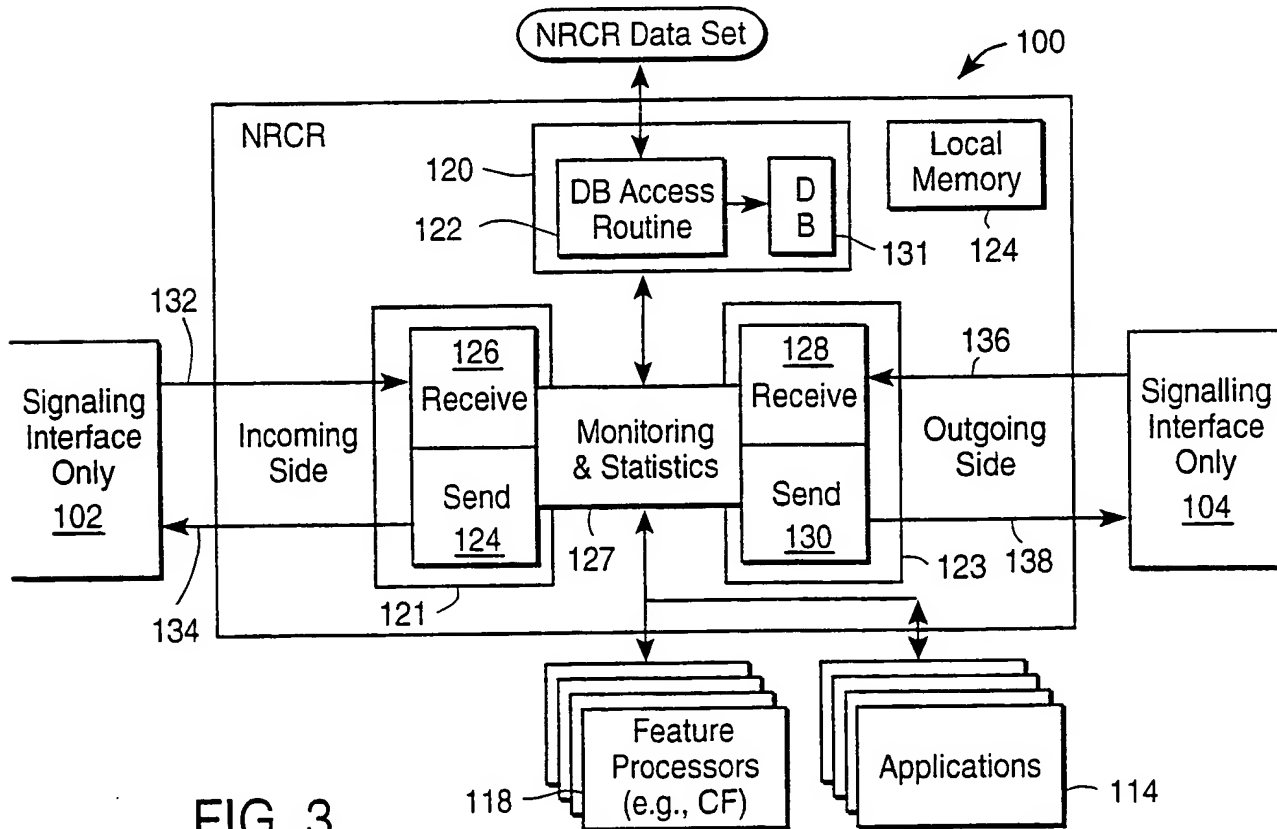


FIG. 3

SERVICE_INDEX_n (e.g., call forwarding, call transfer)

INTERCEPTOR_TYPE (one value only)

REJECT (requestor should redirect)

ACK/ (3rd party to redirect, connection to requestor subsequently released)


BLOCK (absorb the request, no response)

SCHEDULE (e.g., bit map time-of-day, day-of-year when/when not to intercept)

RESTRICTIONS (e.g., bit map of exceptions: conditions, users)


FIG. 4

4/9

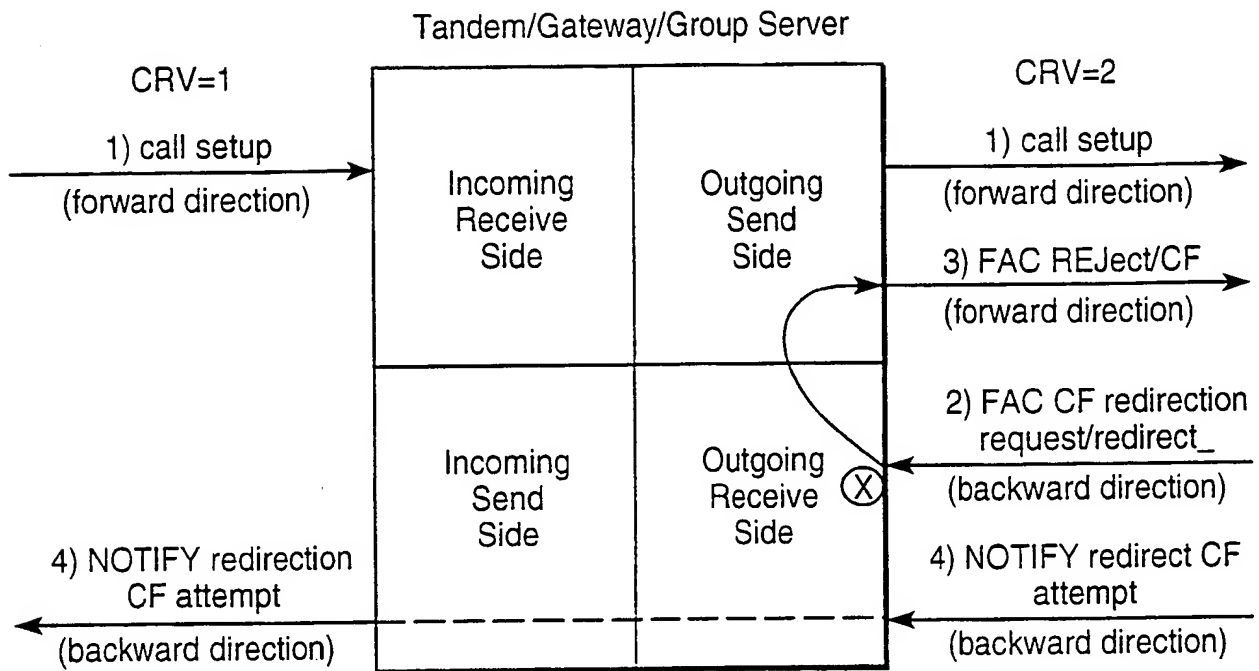

⊗ NRCR Monitoring

FIG. 5

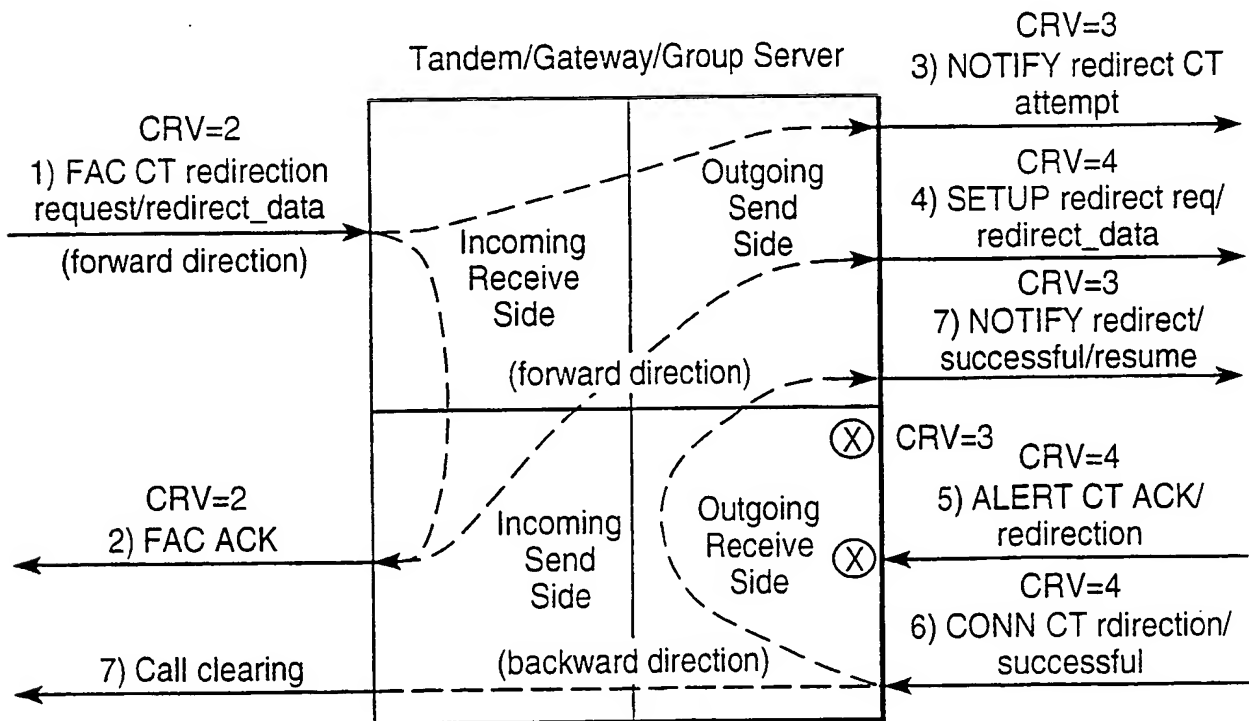

⊗ NRCR Monitoring

FIG. 6

5/9

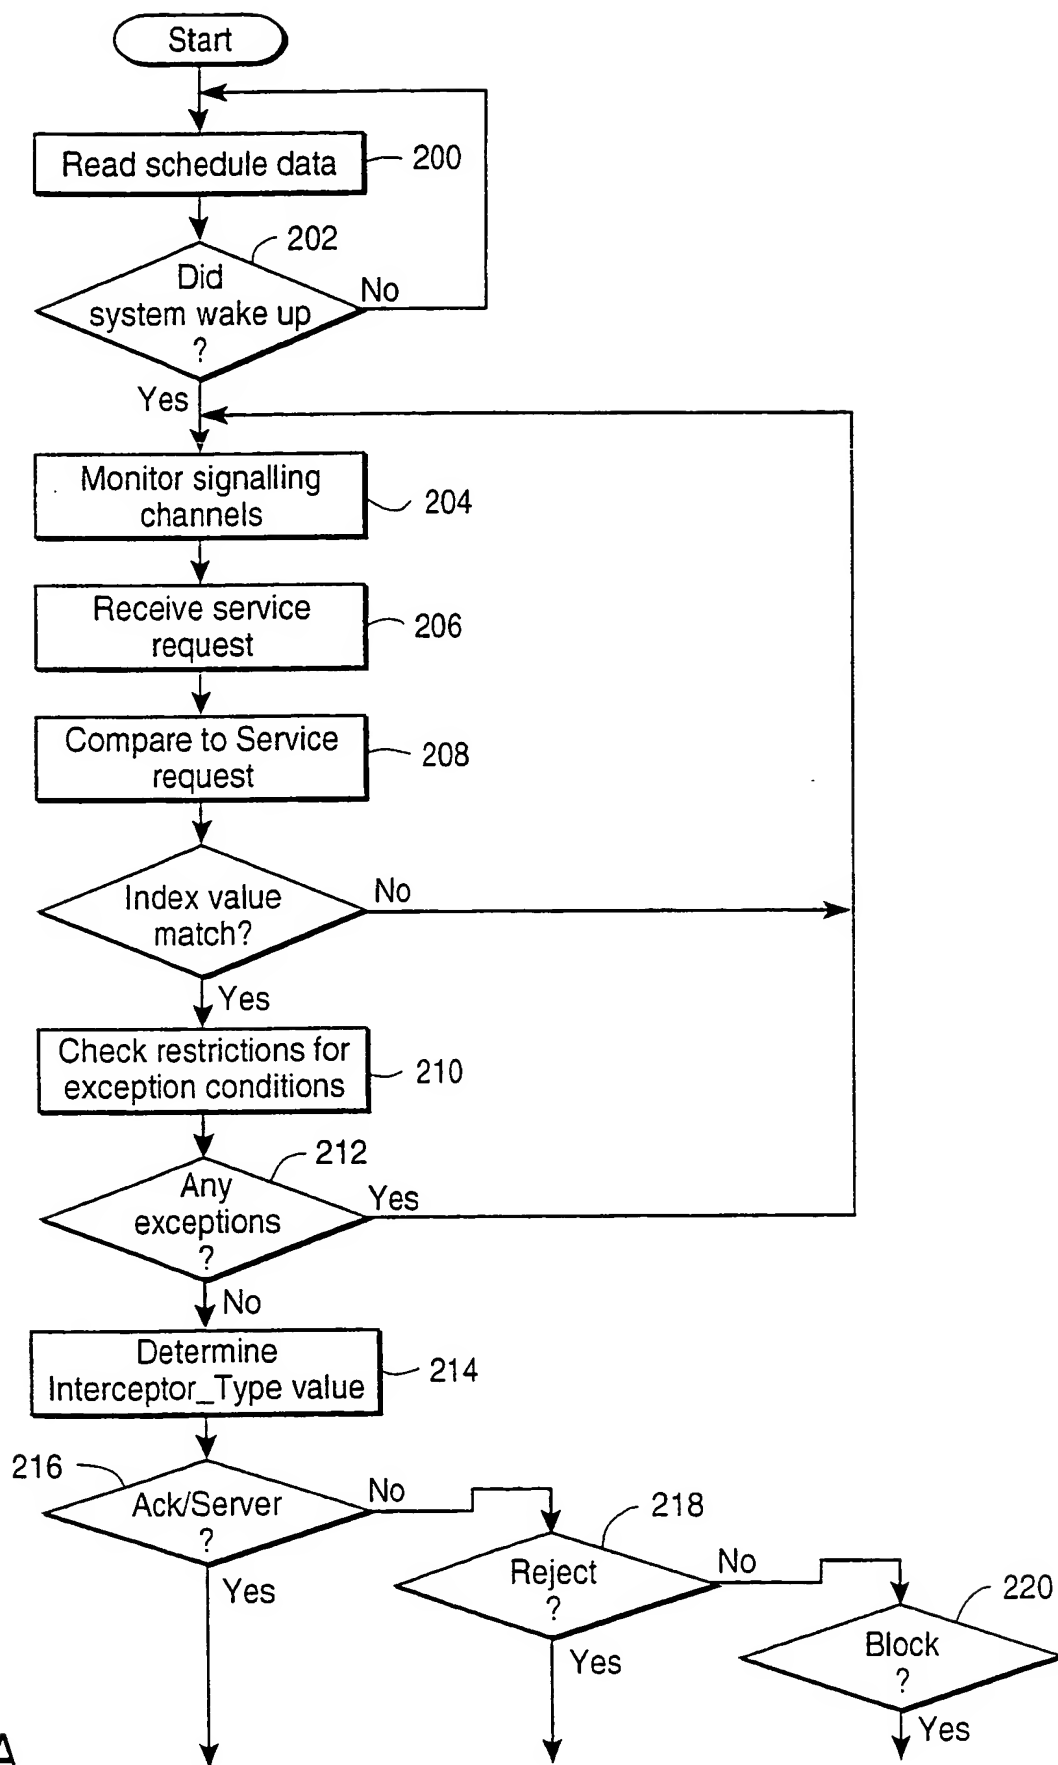


FIG. 7A

6/9

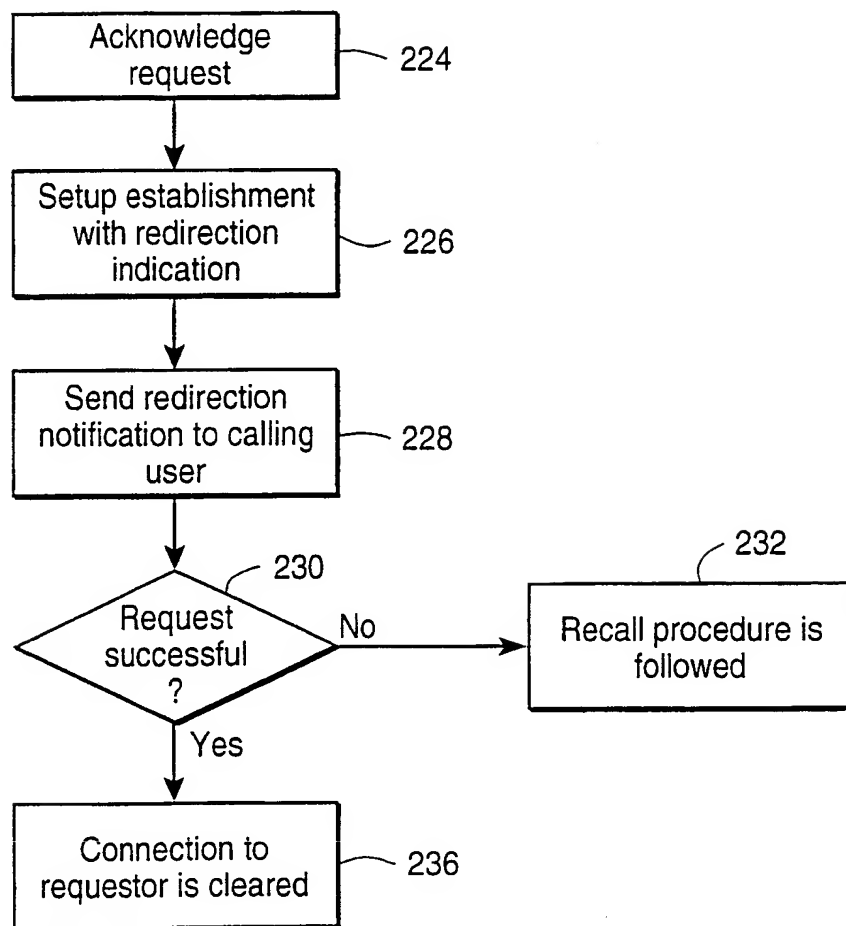


FIG. 7B

7/9

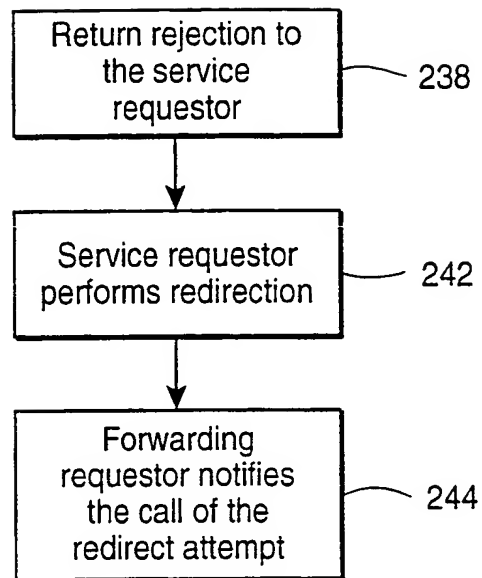


FIG. 7C

8/9

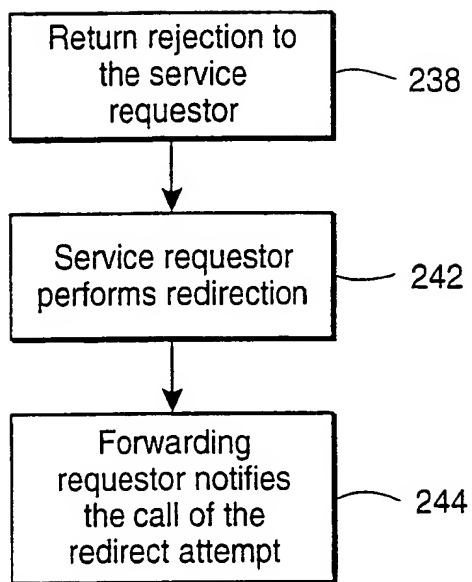


FIG. 7D

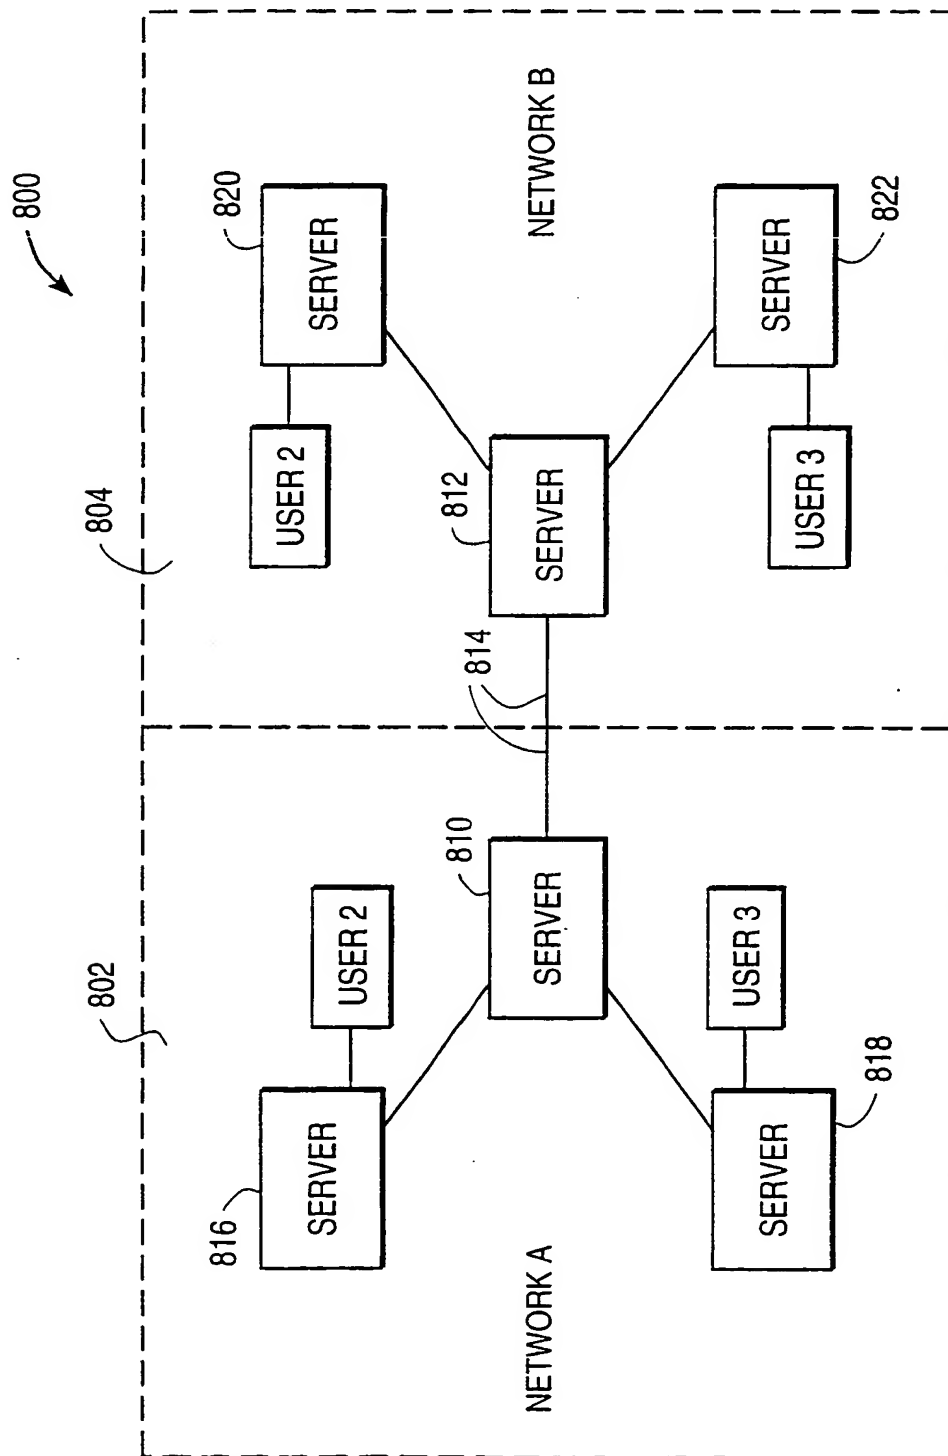


FIG. 8

INTERNATIONAL SEARCH REPORT

Inter Application No

PC.17.83 99/09874

A. CLASSIFICATION OF SUBJECT MATTER

IPC 6 H04Q3/66 H04Q11/04 H04M3/54

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 6 H04Q H04M

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 97 31493 A (SIEMENS BUSINESS COMMUNICATION SYSTEMS, INC.) 28 August 1997 (1997-08-28) page 1, line 4 - line 7 page 2, line 12 - page 4, line 25 page 6, line 7 - line 28; figure 1 page 7, line 17 - page 8, line 17 page 9, line 12 - page 13, line 19 page 16, line 1 - page 17, line 27	1-3,5-12
Y	--- -/--	4

☒ Further documents are listed in the continuation of box C.☒ Patent family members are listed in annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search

14 September 1999

Date of mailing of the international search report

23/09/1999

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Vercauteren, S

INTERNATIONAL SEARCH REPORT

onal Application No
PCT/US 99/09874

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	VAN GELDER J ET AL: "PRIVATE NETWORKING WITH SOPHO-TBX AND SOPHO S SYSTEMS" PHILIPS TELECOMMUNICATION REVIEW, vol. 43, no. 4, December 1985, pages 237-252, XP002032868 page 243, paragraph 3 - page 244, paragraph 1; figures 6A,6B	4
A	---	1,2
X	GB 2 299 913 A (NORTHERN TELECOM LTD) 16 October 1996 (1996-10-16) page 1, line 5 - line 12 page 9, line 16 - page 12, line 3 page 15, line 11 - page 19, line 7 claims 1-6	1-3,5-9
A	---	4,10-12
X	US 5 452 349 A (UEHARA T ET AL) 19 September 1995 (1995-09-19) column 1, line 7 - line 12 column 3, line 20 - line 57 column 4, line 30 - line 62	1-3,5-9
A	---	4,10-12
X	EP 0 487 811 A (BELL TELEPHONE MANUFACTURING COMPANY) 3 June 1992 (1992-06-03) column 1, line 1 - line 9 column 2, line 26 - line 31 column 2, line 50 - column 3, line 30 column 11, line 6 - column 12, line 33	1-3,5-9
A	-----	4,10-12

INTERNATIONAL SEARCH REPORT

Form PCT/ISA/210 (patent family members)

Inter-Application No

PCT/US 99/09874

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 9731493 A	28-08-1997	US 5892819 A CA 2247462 A CN 1216201 A EP 0882368 A	06-04-1999 28-08-1997 05-05-1999 09-12-1998
GB 2299913 A	16-10-1996	CA 2146186 A AU 5039696 A CN 1142150 A US 5867569 A	04-10-1996 17-10-1996 05-02-1997 02-02-1999
US 5452349 A	19-09-1995	JP 5300257 A	12-11-1993
EP 0487811 A	03-06-1992	AU 646700 B AU 8786091 A CA 2056506 A JP 4287450 A	03-03-1994 04-06-1992 30-05-1992 13-10-1992

THIS PAGE BLANK (USPTO)

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☒ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.

THIS PAGE BLANK (USPTO)